CCU03A231WNIUX

indoor

> CONTACT US



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Cooling Capacity L35L35	325/355	W
Cooling Capacity L33L33	1109/1211	BTU/hr
Cooling Capacity L35L50	265/275	W
	904/938	BTU/hr
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	1.3/1.5	А
Rated Power L35L35	185/215	W
Rated Power L35L50	215/265	W
Frequency	50/60	Hz
Max Current	9	А
Fuse T	2	А
GENERIC DATA		
Casing Material	Painted Steel	
RAL Number	7035	
Electrical Connection	Connector	
Refrigerant Number	R134a	
Refrigerant Charge	130	g
Maximum Allowable Pressure	HP 2.4/LP 0.6	MPa



## COOLING UNITS Wall Mounting



CCU03A231WNIUX

indoor

> CONTACT US

	Technical data		
	ENVIRONMENTAL AND THERMAL DATA		
	Protection Degree Internal Circuit	IP54	
	On anation Towns and the	20÷50	°C
Operating Temperature	68÷122	°F	


CLIMATE CONTROL SYSTEMS



CCU03A231WNIUX

indoor

> CONTACT US

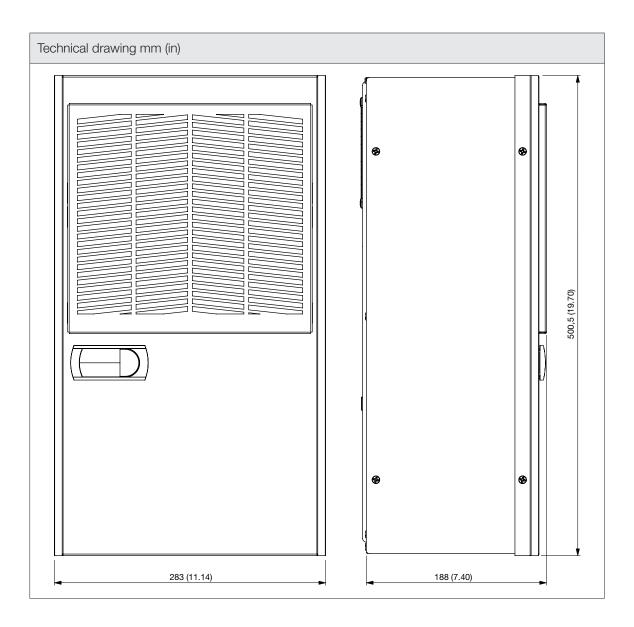



CCU03A231WNIUX

indoor

> CONTACT US

