CCU08A231WN0UX

outdoor

> CONTACT US



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data			
APPROVALS			
Approvals	CE; UKCA		
PERFORMANCE			
Cooling Capacity L35L35	855/935	W	
	2917/3190	BTU/hr	
Cooling Capacity L35L50	685/715	W	
	2337/2440	BTU/hr	
ELECTRICAL DATA			
Rated Voltage	230	V a.c.	
Rated Current	2.9/3.2	А	
Rated Power L35L35	395/455	W	
Rated Power L35L50	445/535	W	
Frequency	50/60	Hz	
Max Current	17	А	
Fuse T	6	А	
GENERIC DATA			
Casing Material	Painted Steel		
RAL Number	7035		
Electrical Connection	Connector		
Refrigerant Number	R134a		
Refrigerant Charge	250	g	
Maximum Allowable Pressure	HP 2.4/LP 0.6	MPa	



## COOLING UNITS Wall Mounting



CLIMATE CONTROL SYSTEMS

CCU08A231WNOUX

outdoor

> CONTACT US


Technical data		
ENVIRONMENTAL AND THERMAL DATA		
Protection Degree Internal Circuit	IP55	
On anation Towns and the	-20÷55	°C
Operating Temperature	-4÷131	°F



CCU08A231WNOUX

outdoor

> CONTACT US

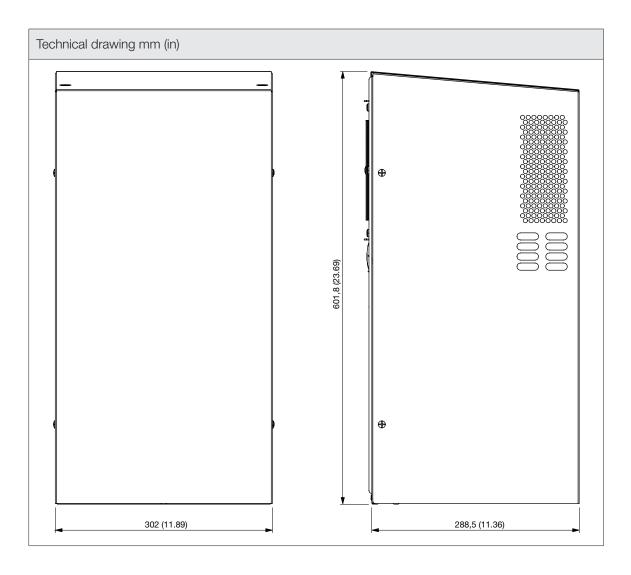



CCU08A231WN0UX

outdoor

> CONTACT US

