CCU09A231RNIUX

indoor

> CONTACT US



The CCU series roof-mounted cooling units represent an ideal solution for cooling battery electrical panels or when accessibility and lateral space are limited, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data		
APPROVALS		
Approvals	CE; UKCA	
PERFORMANCE		
Cooling Capacity L35L35	975/1075	W
	3327/3668	BTU/hr
Cooling Capacity L35L50	795/815	W
	2713/2781	BTU/hr
ELECTRICAL DATA		
Rated Voltage	230	Va.c.
Rated Current	4.2/4.6	А
Rated Power L35L35	445/525	W
Rated Power L35L50	495/595	W
Frequency	50/60	Hz
Max Current	20	А
Fuse T	8	А
GENERIC DATA		
Casing Material	Painted Steel	
RAL Number	7035	
Electrical Connection	Connector	
Refrigerant Number	R134a	
Refrigerant Charge	210	g
Maximum Allowable Pressure	HP 2.4/LP 0.6	MPa

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



## COOLING UNITS Roof Mounting



CCU09A231RNIUX

indoor

> CONTACT US

Technical data			
ENVIRONMENTAL AND THERMAL DATA			
Protection Degree Internal Circuit	IP54		
Operating Temperature	20÷50	°C	
	68÷122	°F	


CLIMATE CONTROL SYSTEMS



CCU09A231RNIUX

indoor

> CONTACT US

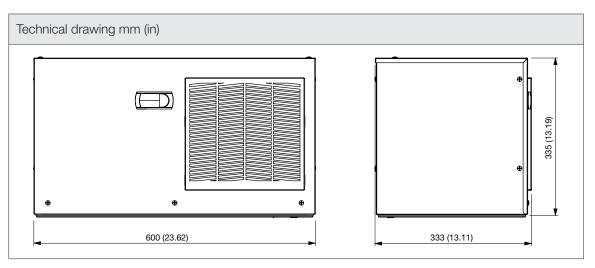

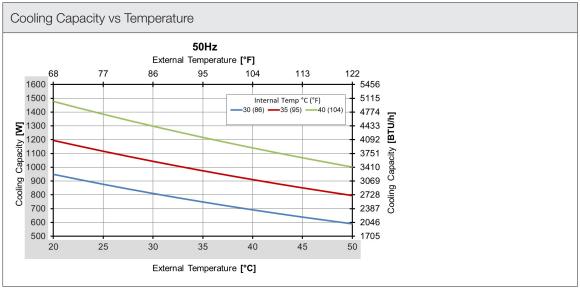


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.



## COOLING UNITS Roof Mounting



CLIMATE CONTROL SYSTEMS

CCU09A231RNIUX

indoor

> CONTACT US

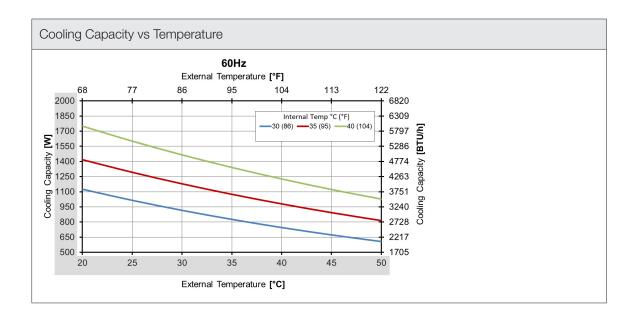


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

